



BETTER SOLUTIONS



InJet®

SPRAY IN AIR
TECHNOLOGY



CHAMBER



INDIVIDUAL
PROCESSES



TECHNICAL DATA SHEET

InJet® 3179 CRD CUSTOMLINE

Big Board



APPLICATION

STENCIL, MISPRINT, SQUEEGEE
PUMPRINT
PCB

REMOVING

→ Solder pastes
→ SMT adhesives
→ Flux



GENERAL INFORMATION

CUSTOMLINE CLEANING SYSTEM

The **Customline section** is meant for customers who have specific requirements. Together we will configure the cleaning system to achieve the highest efficiency and quality of cleaning according to your wishes and expectations.

DEVELOPED AND INTENDENT FOR RECOMMENDED

APPLICATION

STENCIL, MISPRINT, SQUEEGEE
PUMPRINT
PCB

REMOVING

→ Solder pastes
→ SMT adhesives
→ Flux

CLEANING TECHNOLOGY

The InJet® 388 series cleaning systems represent unique **vertical Spray-In-Air technology developed** and manufactured by DCT.

The vertically installed Spray-In-Air device minimizes the shadowing effect commonly seen in horizontal cleaners, and maximizes the efficiency of the cleaning process as the cleaning fluid is sprayed directly onto the cleaned component.

CHAMBERS & PROCESSES

1 PROCESS CHAMBER
3 PROCESSES - CLEANING, RINSING, DRYING

PROCESS CONTROL

- Real-time cleaning fluid pressure monitoring
- Control system of fluids limit pressures
- Liquid and filter replacement notification - cycle counting
- Minimum level warning - cleaning and rinsing fluid
- Conductivity measurement - rinse



CLEANING
SYSTEMS

InJet® 3179 CRD





Watch our video




1 PROCESS CHAMBER



3 PROCESSES

- C** CLEANING
- R** RINSING
- D** DRYING

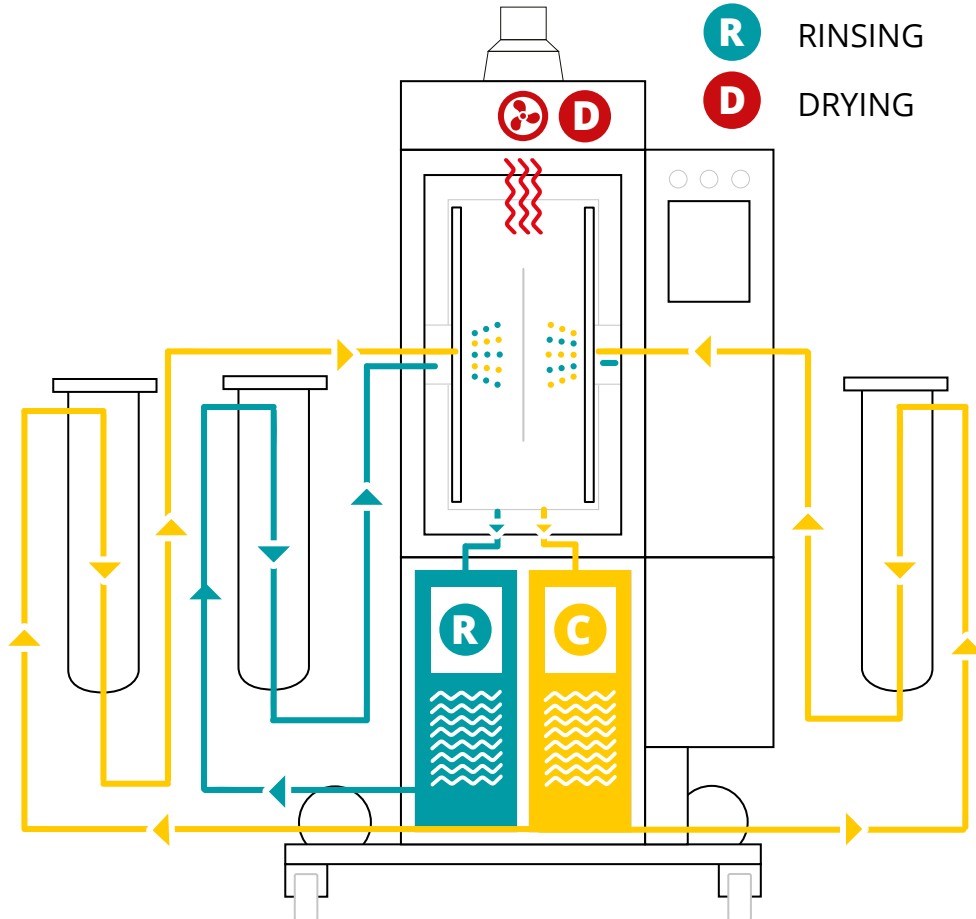

CLEANING PARAMETRES

Cleaning Application	Suitability	Recommended processes temperature		Total usual process time	Capacity per 8 hours
Stencil, misprint, squeegee	★★★	20 – 40°C	68 – 104 °F	18 min.	54 / 27 ***
PumPrint	★★★	40 – 55°C	104 – 131 °F	18 min.	54 / 27 ***
PCB	★★	35 – 55°C	95 – 131 °F	30 min.	768 *

LEGEND: ★★★ highly recommended ★★ recommended ★ applicable

* PCB eurocards / per 8 hours (calculated for dimension of 100 x 160 mm / 3,94 x 6,3 in)

** Parts in soldering palette / per 8 hours (320 x 500 x 50 mm / 12,6 x 19,7 x 1,97 in)

*** Stencils, pumpprints larger than 736 x 736 mm / 29 x 29 in




TECHNICAL PARAMETERS

	metric units	imperial units
Dimensions (w x l x h)	1170 x 2160 x 2015 mm	46.1 x 85 x 79.3 in
Weight	900 kg	1984 lbs
Ø energy consumption per cycle	2,5 kWh	2.5 kWh
Consumption of cleaning agent per cycle - empty process chamber	0,1 – 0,4 l (15 min, 45°C)	0.02 – 0.11 gal (15 min, 113°F)
Consumption of rinsing fluid per cycle - empty process chamber	0,1 – 0,4 l (15 min, 45°C)	0.02 – 0.11 gal (15 min, 113°F)
Compressed air consumption per cycle	2 l / cycle	0.52 gal / cycle
Air consumption of Air knife - chemical residue isolation	166 l / min	44 gal / min
Air consumption - chemical residue isolation in process chamber	260 l / 45 sec	68.68 gal / 45 sec
Max. dimensions of the cleaned parts	100 x 1700 x 900 mm	3.94 x 66.93 x 35.43 in
Exchangeable mechanical filter of cleaning and rinsing fluid	5 – 200 µm	5 – 200 µm
Operating pressures	cleaning: 1,0 Bar – 2,0 Bar rinsing: 0,3 Bar – 2,0 Bar	cleaning: 14,50 PSI – 29,00PSI, rinsing: 4.35 PSI – 29,00 PSI
Cleaning fluid flow rate	400 l / min	105.67 gal / min
Temperature range setting of the cleaning and rinsing fluid	From ambient temperature to 60°C	From ambient temperature to 140°F
Conductivity range settings of the rinsing fluid in the tanks.	0 – 2000 µS/cm	0 – 2000 µS/cm
Temperature range setting of the drying	From ambient temperature to 80°C	From ambient temperature to 176°F
Noise level	< 70 dB	< 70 dB
Device control	PLC + 8,4" touchscreen	PLC + 8.4" touchscreen
Volume of the storage tanks	125 l	33 gal

DIMENSIONS



MINIMUM SERVICE SPACE AROUND THE MACHINE

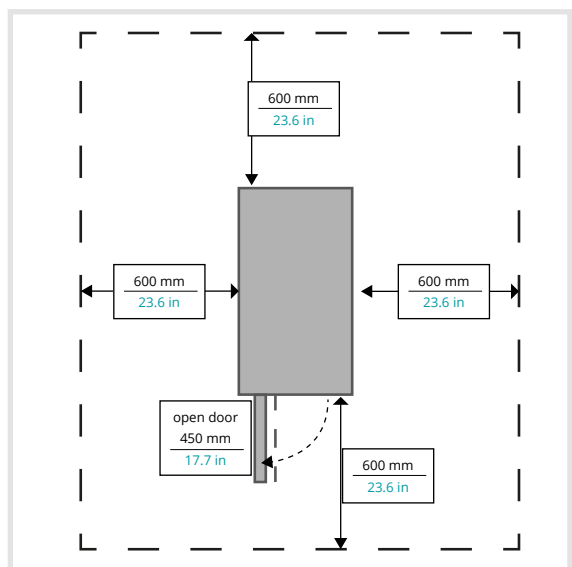






INSTALLATION REQUIREMENTS

	metric units	imperial units
Power supply	400V, 32A, 50Hz (3+N+PE)	UL 400V, 32A, 60Hz* (3+N+PE)
Pmax	12 kW	12 kW
Compressed air connection	Pipe Ø 6 mm and Ø 10 mm - 5 m	Pipe ID 0.24 in and ID 0.39 in - 196,9 in
Recommended working pressure	4,5- 6 Bar	65.25 – 87 PSI
Compressed air quality	3. Class **	3. Class **
Exhaust pipe diameter	Ø 100 mm	ID 3.94 in
Exhaust pipe capacity	4 x 380 m ³ /h	4 x 13400 ft ³ /h
Minimum liquid for first run	2 x 95 l	2 x 25.1 gal
Service space required around the device	600 mm	23.6 in

* When using frequency convertor

** According to the norm ISO 8573-1

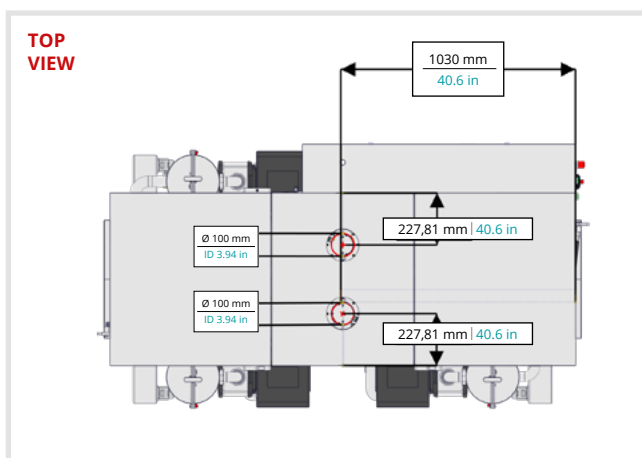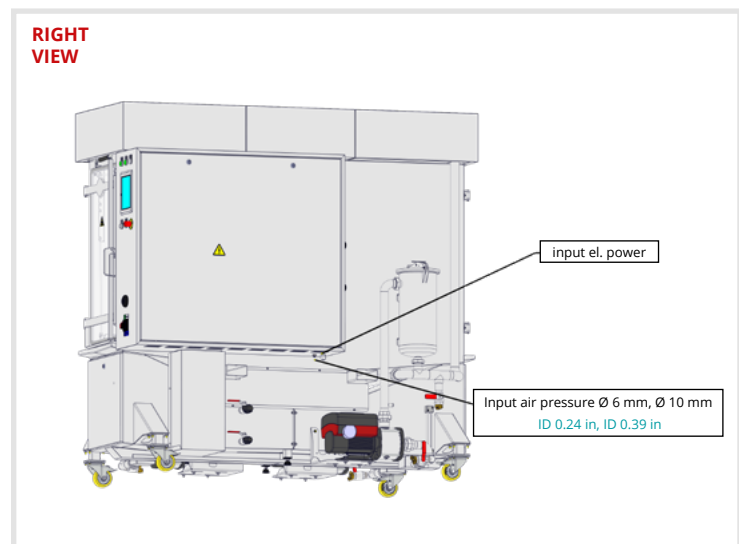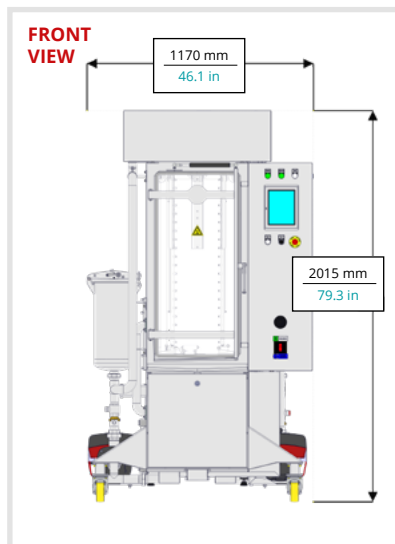

STANDARD EQUIPMENT



MECHANICAL EQUIPMENT

Filtration of mechanical particles
Consumption savings - Residue air-isolation
Chimney flap - automatic
Draft diverter with drip plate - 100 mm
Pressurized air coupling for external pump connection
Castor wheels with brakes - BLICKLE
Door lock - automatic
Manual air-bleeding for pumps
Mechanical filter lock
Glass level gauge in stainless steel housing
Spare parts (base kit)



ELECTRO EQUIPMENT

PLC controller + 8,4" touchscreen display
Heating system - cleaning fluid, rinsing fluid
Emergency stop button
ESD earthing point - for operator



SOFTWARE EQUIPMENT

Language version - Czech + English
Five programs with individually settable parameter
Three-level logging rights - operator, maintenance, engineer
Minimum level warning - cleaning, pre-rinsing and rinsing fluid
Liquid and filter replacement notification – cycle counting
Control system of fluids limit pressures
Real-time cleaning fluid pressure monitoring

MANDATORY EQUIPMENT



Status light main + acoustic signalization
Conductivity measurement - rinse 0-2000 µS - blocking optional

OPTIONAL EQUIPMENT



MECHANICAL EQUIPMENT

2PR filtrace pro Bigboard

Automatic cleaning agent refilling (without pump)

Automatic cleaning agent discharging (without pump)

Automatic rinsing water refilling (without pump)

Automatic rinsing water discharging (without pump)

Common fluids draining- manual control

Stainless steel drip tray - ESD floor protection

External portable pump

External pump for automatic discharge

Integrated pump for automatic discharge

Integrated pump for manual discharge

Filtration sandwich - external

Drain valve with lock

Squeegees VD



ELECTRO EQUIPMENT

Control of external exhaust ventilator - instalation at customer

Electronic control - drying spirals functionality

Frequency convertor

Transformer with/without UL



SOFTWARE EQUIPMENT

Fluid heating timer - clening and rinsing

Language mutation (CZE, ENG, GER, POL, CHI, RUS, ITA, SPA, MAY, HUN)



TRACEABILITY

Traceability OFF line

Traceability ON line

OPTIONAL EQUIPMENT



FRAMES EQUIPMENT

Frames for PCBs

Frames for frameless stencils

Frames for squeegees



TROLLEYS, STANDS, HOLDERS EQUIPMENT

Mechanical table holder for a mechanical carrier frames

Mechanical manipulation trolley of PCB holders - 10 positions

Mechanical manipulation trolley of PCB holders - 8positions



EXTERNAL TANKS AND ACCESSORIES

Tank - 200l - rinse fluid

Conductivity measurement

Tank - 200l - cleaning fluid (readymix)

Air-based fluid mixing

Heating the fluids in the tanker (200 L)

Tank - 200l - cleaning fluid (concentrate) + dosing pump

1000l IBC tank

Monitoring the level in discharge external tank - IBC 1000 l

Monitoring the level in external tank for DI water - IBC 1000 l

Water pump with pressure tank



For more information, a list of options and a selection of suitable equipment, please contact a DCT specialist in your country or the manufacturer directly.



DCT QUALITY

All of the InJet®, AirJet® and Sonix® cleaning systems developed by DCT are characterised by the highest quality on the market, high reliability, ease of use, simple maintenance, an extremely long lifespan, and the longest warranty on the cleaning system market.

These afore-mentioned benefits are achieved by the **precise manual production** of the cleaning systems in the Czech Republic, and thanks to the superior quality of the used materials and components.

Cleaning systems boast a **unique all-stainless-steel construction**, which is welded manually from AISI 304 and AISI 316 stainless steel and then chemically passivated.

The cleaning systems are designed and manufactured with a focus on **ease of use** by operators, **simple maintenance**, and **smart process parameter setting**. They are equipped with industrial PLC IDEC, a well arranged colour touch display with 3-level access (operator, maintenance, engineer), and with 3 or 5 adjustable cleaning programmes as standard.

The device **automatically and permanently checks** all **processes, operating fluid levels** and **process temperatures**, and also gives timely notification of the need to replace individual consumables or fluids.

Monitoring of the cleaning process history, whether offline or online, is ensured by an optional traceability function.

A wide range of **standard hardware** and **software equipment** is available for every cleaning system. However, DCT also excels by its **flexibility when resolving non-standard** cleaning systems and their accessories.

Our cleaning systems, together with our cleaning fluids and local application and technical support, bring you a long-term reliable, powerful and stable cleaning process, even under the most demanding continuous operation conditions.

With all its cleaning systems, DCT offers a **wide range of hardware and software equipment**, special frames with hitches for the parts you want to clean, and countless variants in addition to the basic process monitoring options which use traceability.



For more information, a list of options and a selection of suitable equipment, please contact a DCT specialist in your country or the manufacturer directly.



STAINLESS STEEL DESIGN

Main support frame
Storage tanks
Process chambers
Fluid and air distribution systems
Spray arms and nozzles
Mechanical high-capacity filters
Process chamber door frame and handle
External shielding
Active filters for rinsing DI water

Date of issue: **4/2025**

InJet® is a registration trademark of DCT Czech s.r.o.

DCT Czech s.r.o.,
Tovární 85, 679 21 Černá Hora, Czech republic
e-mail: info@dct.cleaning, www.dct.cleaning